

NAC-2604

30Watt 100Volt Lawn Speaker




MAIN FUNCTIONS

(1) Lawn speaker, high-quality waterproof garden stone shaped glass steel shell speaker, coaxial speaker design, full sound quality, suitable for all kinds of landscape residential areas, leisure occasions.

(2) Lawn speakers can be directly connected to 100V line output. The jumper connector of its 100V transformer primary winding can be used for power setting. Users can implement power selection.and can be used for different power Settings. Users can easily achieve two power choices.

Circuit Diagram

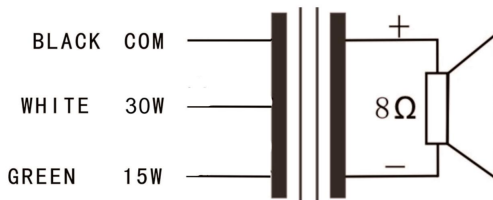


Wiring:

When wiring, power amplifier output COM needs to be connected with the black line, and power amplifier 100V output needs to be connected with the corresponding line
Such as:

With rated power of 15W, COM is connected to the black line and 100V is connected to the green line.

With 30W rated power, COM is connected to the black line, and 100V is connected to the white line.



SPECIFICATION

POWER PARAMETERS

Rated Parameters:15W/30W

Max Parameters:40W

AUDIO PARAMETERS

Frequency Response:120-15KHz

Sensitivity:95±3dB

MECHANICAL&ENVIRONMENT PROPERTIES

Installation Method:Ground Mount

Installation Environment:Ourdoor Locations

Shell Material:Marble-colored fiberglass

Working Temperature:-25°C~+55°C

Working Humidity: < 95%

Weight:4.2Kg

Dimension: $\phi 370 \times 395$ mm

Warranty:2 Years

ACCESSORIES



1×Lawn Speaker

1×Quick Installation Guide



1×Quality Certificate and Warranty Card

APPLICATION


The 30Watt 100Volt Lawn speaker NAC-2604 can be connected with constant voltage amplifier for receiving broadcast or announcement from Audio Management Software or IP paging Console .

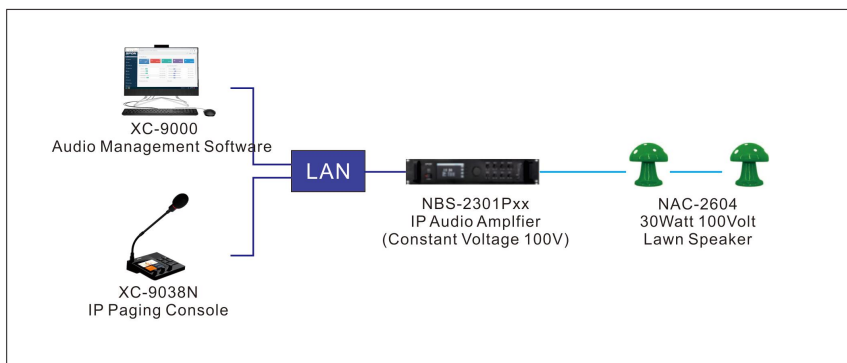

INSTALLATION

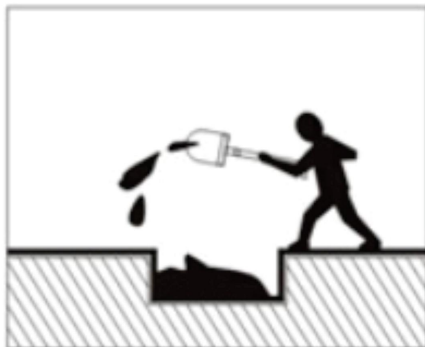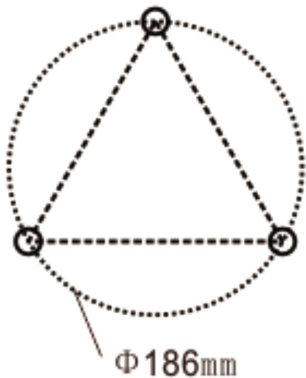

Start by digging a hole in the ground

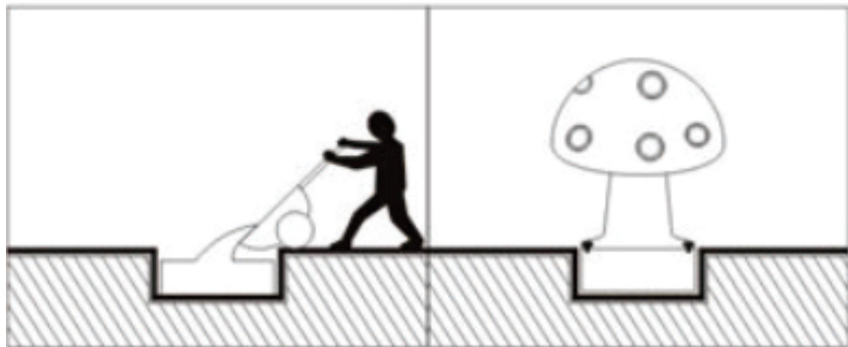

Pour 200# concrete

Secure the speaker with 8mm screws

